

Thank you for purchasing Mimaki product.
 This "Setup Guide" describes the installation instructions, activation procedure of ArtiosCAD DesignerSolution and initial settings.

First, confirm the following items:


Read the "Please read in the beginning," prior to the installation and make sure the operating environment.

PC	Intel® Core 2 Duo 2.4 GHz or more Memory 4GB or more Available memory 5GB(In ArtiosCAD Designer Solution) Available memory 500MB(Required for operation)
Operation System	Microsoft® Windows®10 Home / Pro / Enterprise 64bit (Recommended) Microsoft® Windows® 8, 8.1 Pro / Enterprise 64bit (Recommended) Windows® 7 Professional / Enterprise / Ultimate 64bit
Monitor	1024 x 768 Pixel 16bit color or more
Plotter	Mimaki CFL-605RT, CF2 series,CF22-1225

Installation procedure

If your system is Windows, insert the DVD and the install menu will automatically start. If it does not start automatically, please start the installer by double-clicking the "Setup.exe" on DVD.

1. Click [Typical Installation].

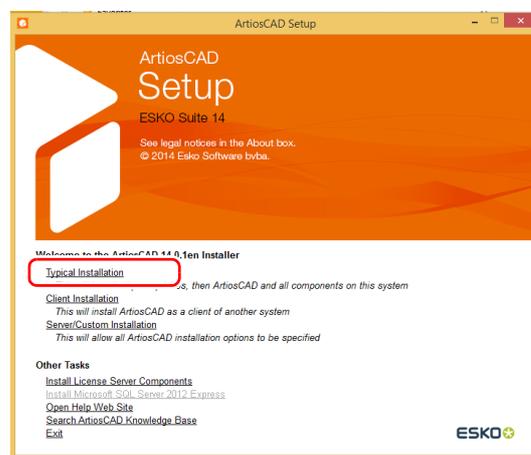


2. Installation of SQL server

For a PC which is not installed SQL Server, the set up of SQL Server will begin.
 It may take some time to set up depending on the PC environment.


3. Click [Next].



4. Select “I accept the terms in the license agreement”, then click “Next”.

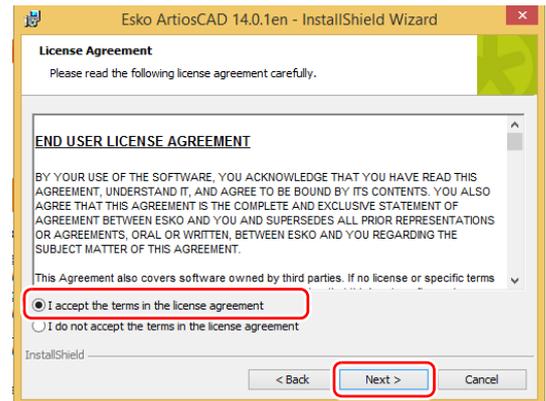


5. Select “Local License”, then click “Next”.

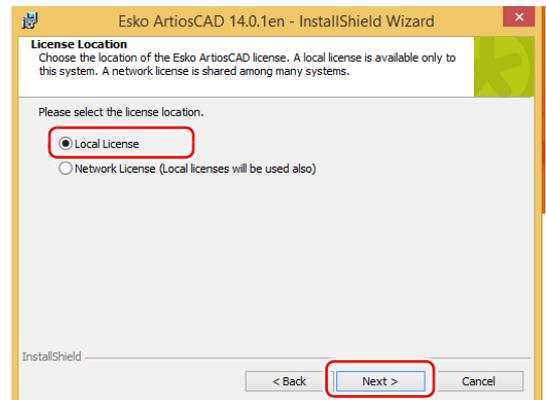


6. If you want to change the destination folder, click “Change” button to select the folder in which you want to install, then click “Next”.



7. Click [Install].

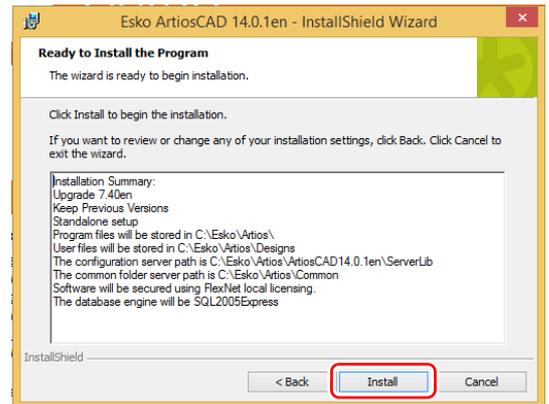

8. Click "Finish" and installation complete.

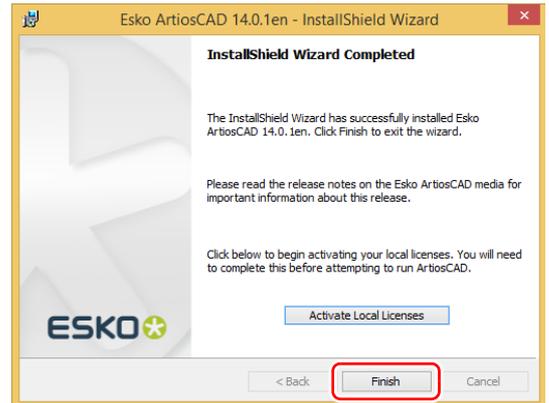

Important!


- If when you start the ArtiosCADLite without activation, the screen of "function can not be used" will appear.




Activation procedure

After the installation is complete, you can use the ArtiosCAD Designer Solution by performing the activation.


1. Click [Start] - [Esko] - [Local License Manager] - [Manage Local Licenses] to start.

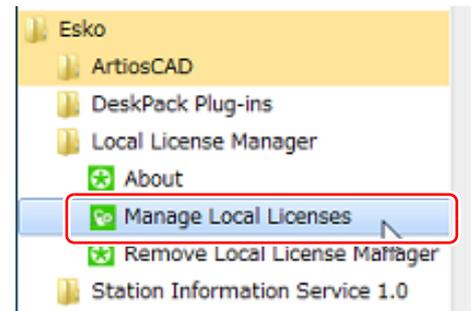


2. Click [Activate].
Or drag and drop the product key file.

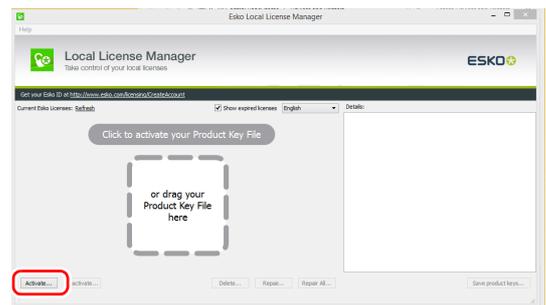

3. Click [Next].

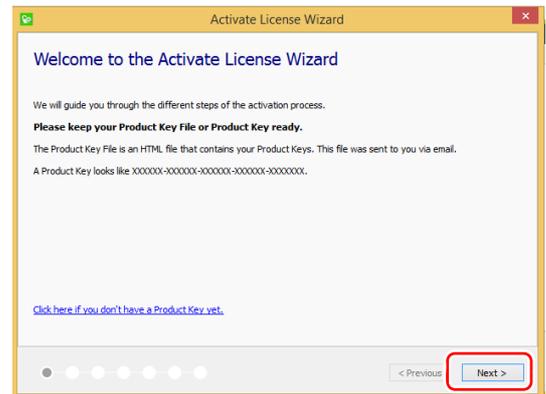



4. Select "I have received an HTML file containing my Product keys." and click [Next].

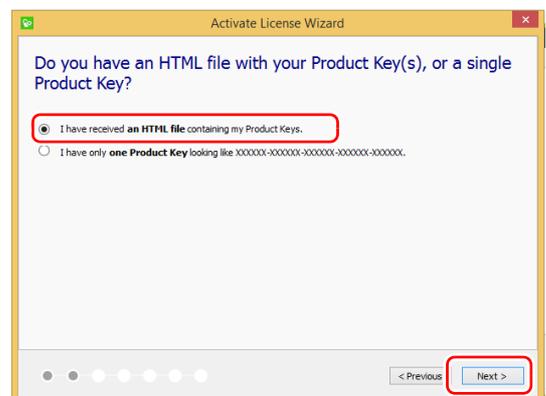


5. Click [Browse...] to select the product key file (html type), and click [Next].

Important!


- If you drag and drop a product key file in step 2, the HTML file has been selected, so simply click "Next".

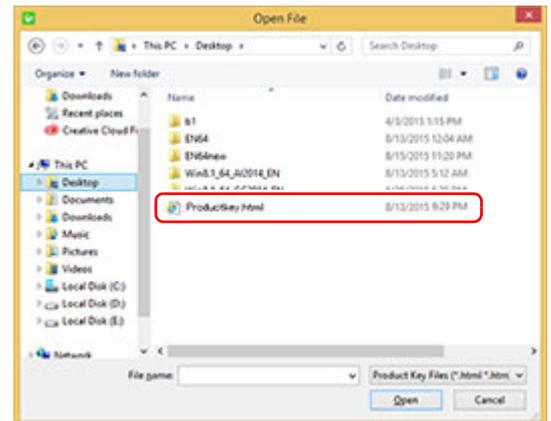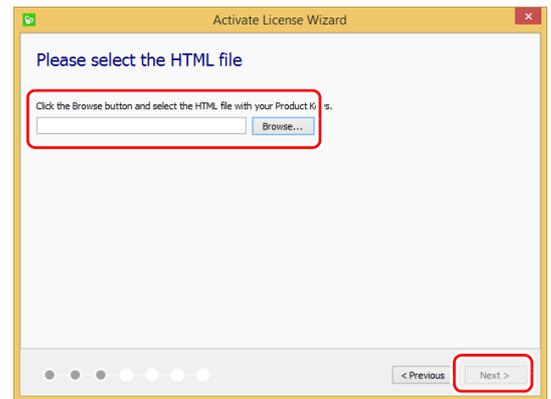

6. Enter Esko ID that is sent by e-mail from Esko, Inc, enter the password that you set at the time of Esko ID registration and click [Next].

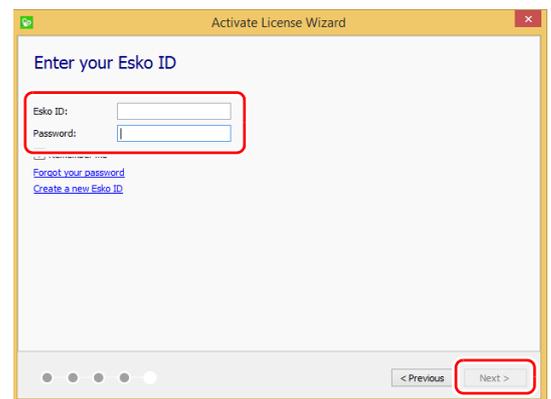


7. Activation complete

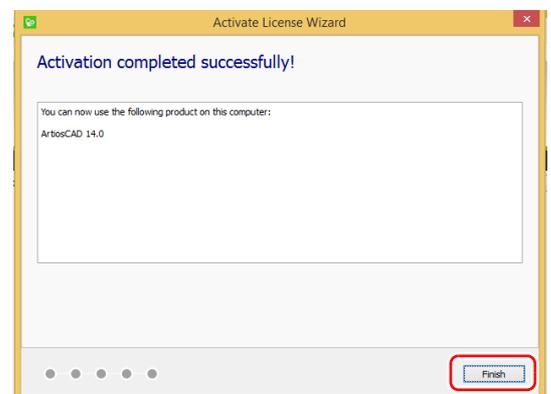


Activation (proxy authentication) procedure

This is the activation procedure for the installed PC which is not connected to the network.


1. Click [Start] - [Esko] - [Local License Manager] - [Manage Local Licenses] to start.

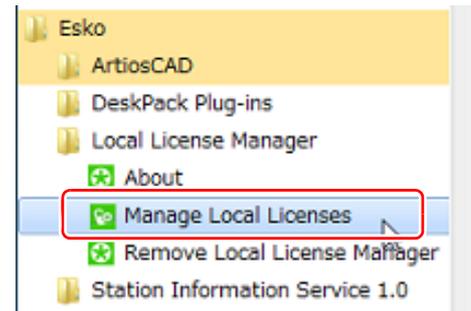


2. Click [Activate].
Or drag and drop the product key file.

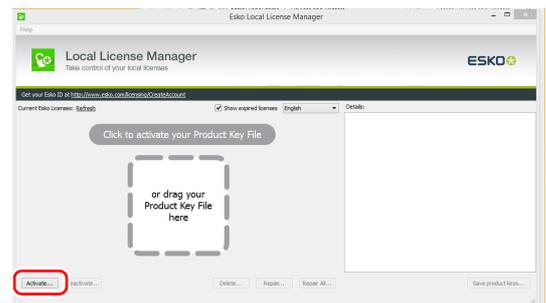

3. Click [Next].

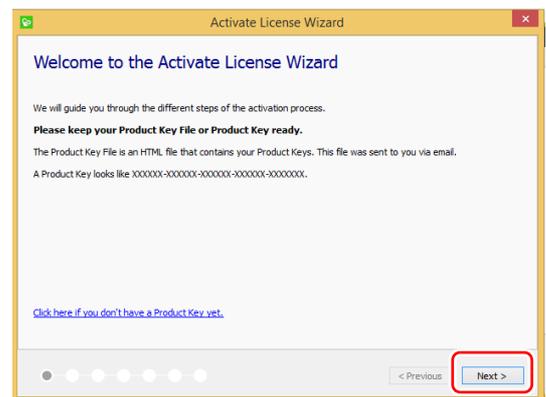



4. Select "I have received an HTML file containing my Product keys." and click [Next].

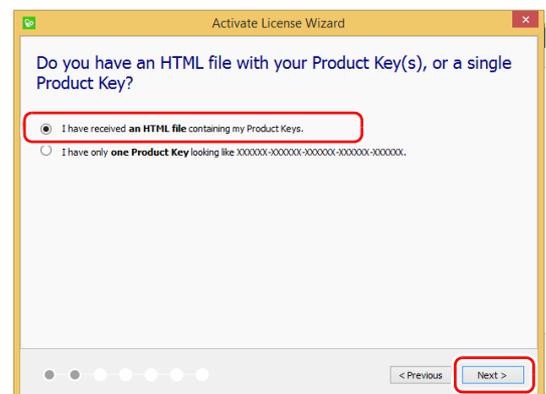


5. Click [Browse...] to select the product key file (html type), and click [Next].

Important!


- If you drag and drop a product key file in step 2, the HTML file has been selected, so simply click "Next".

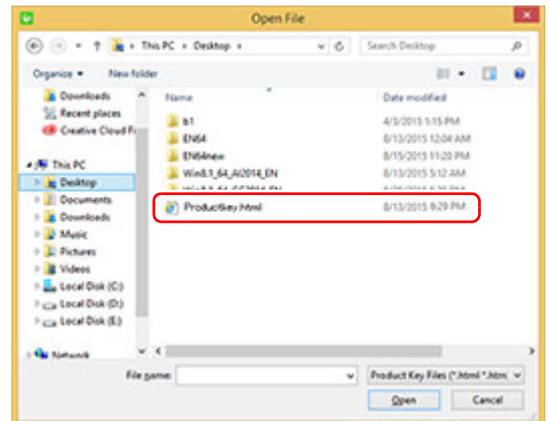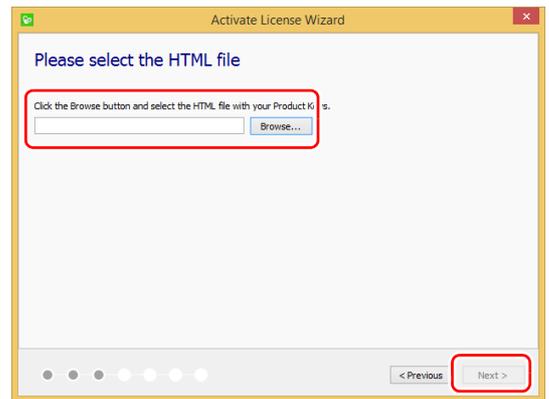


6. If the PC is not connected to the network, select [Activate via another online computer] and then click the [Next] button.

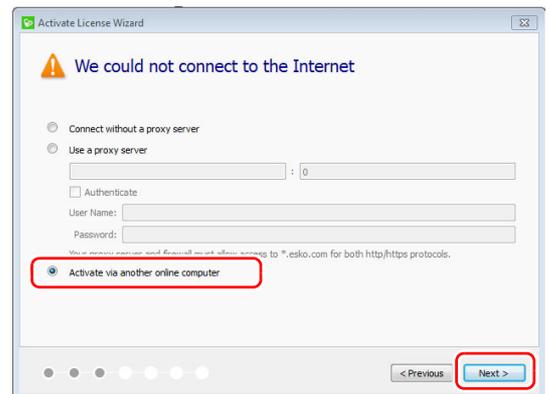


7. Select "Step1: Save an activation request file" and click [Next].

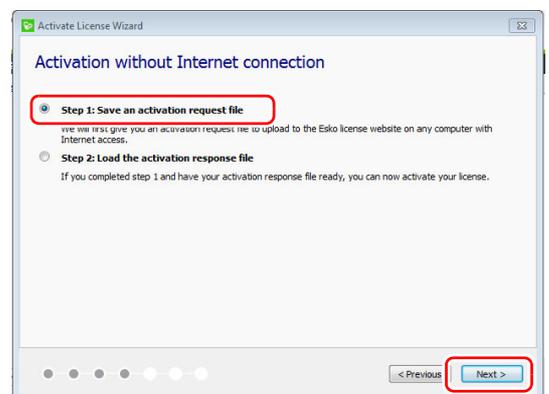


8. Input the Esko ID.

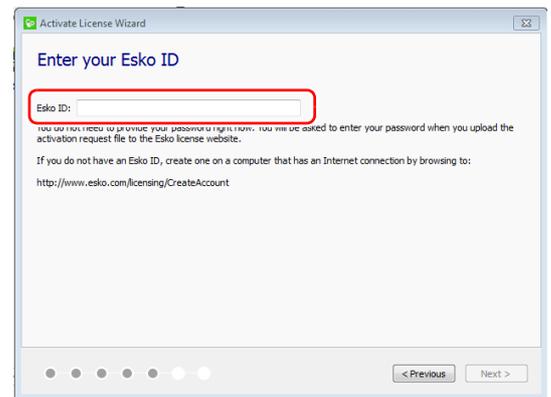


9. Save the activation request file.

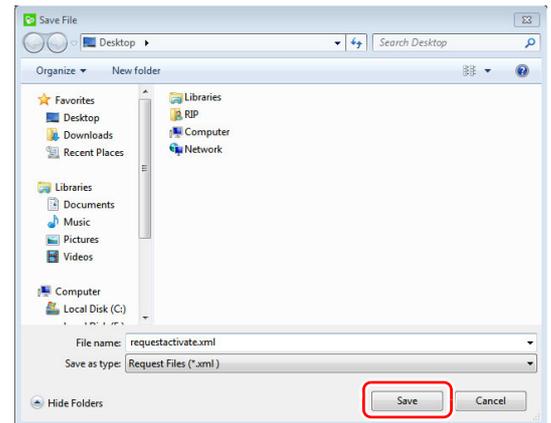


10. Go to the following URL on a PC that is connected to the network <http://www.esko.com/licensing/Activation>. Select the [Offline Product Activation], and then click the [Continue] button.

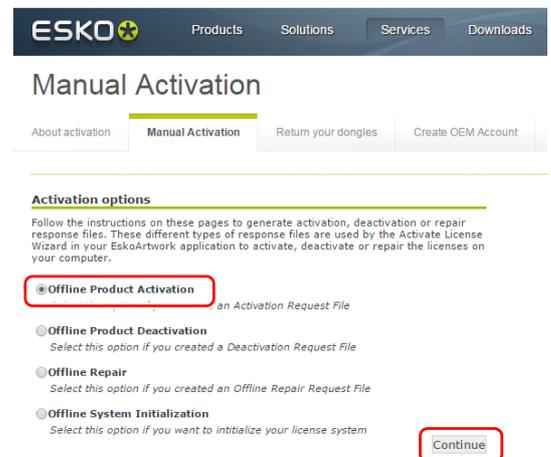


11. Select the file that was saved in step 10, and then click the [Continue] button.

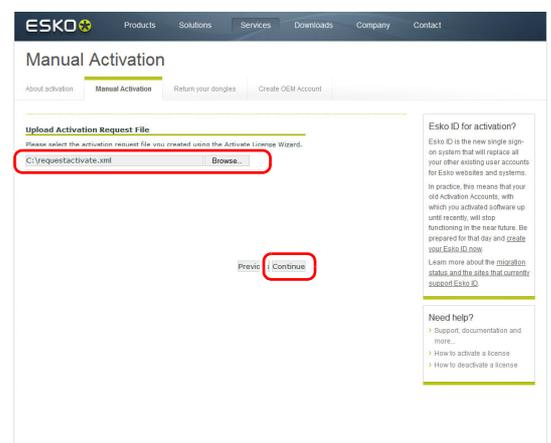

12. For Esko ID that you entered in step 9 is displayed, enter the password and click the [Continue] button.

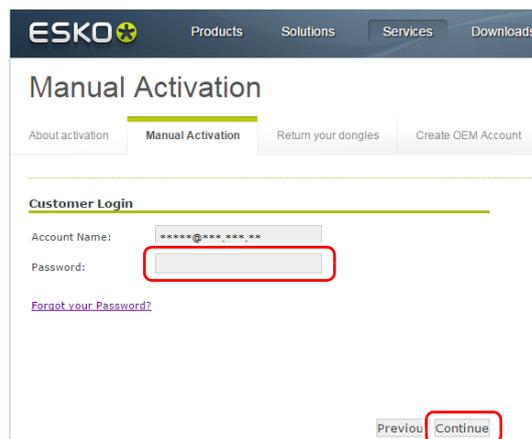


13. Make sure that the activation on the Web has been completed, and then click the [Continue] button.

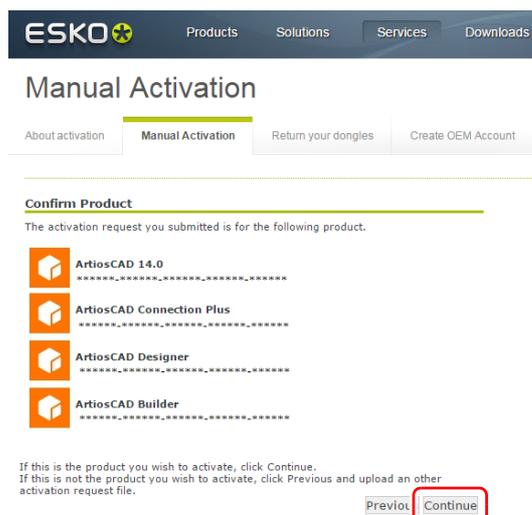


14. Click the [Download] button, and then save the result of the activation in the file.




15. Perform the steps 2-7 on the PC you have installed ArtiosCAD Designer Solution.
[Step2: Select Load the activation response file], and then click [Next] button.

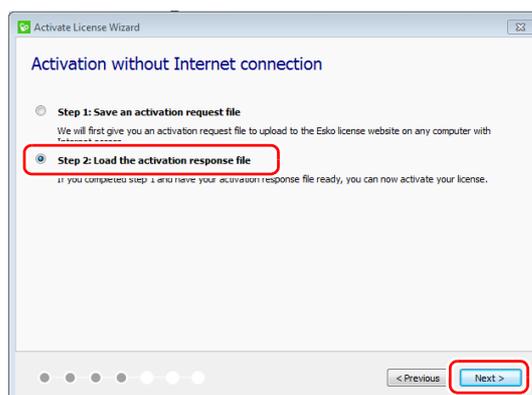

16. Click [Browse...] button, and then select the activation response file that you saved in step 15. Click [Next] button.

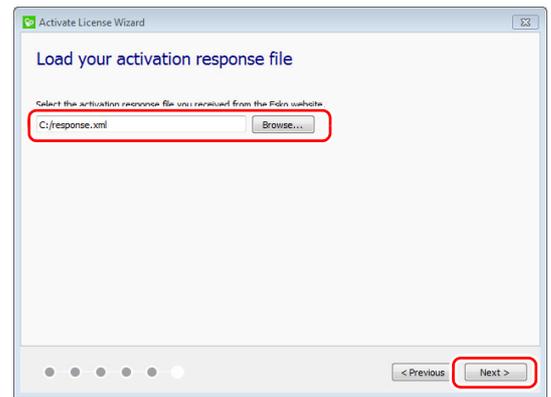


17. Activation is now complete.

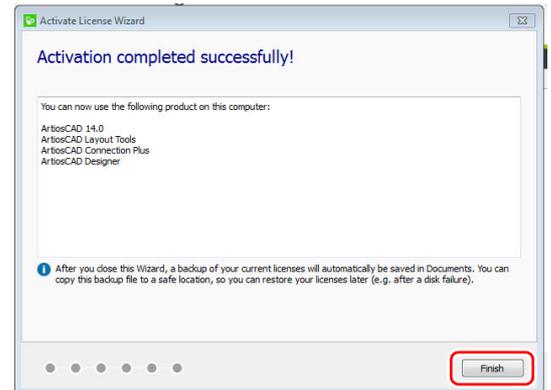


Activation release procedure

1. Click [Start] - [Esko] - [Local License Manager] - [Manage Local Licenses] to start.

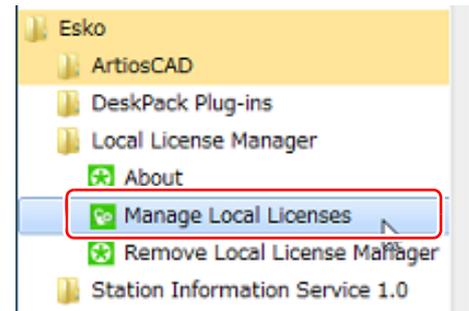



2. While "ArtiosCAD" is in the selected state, click [Deactivate] button.

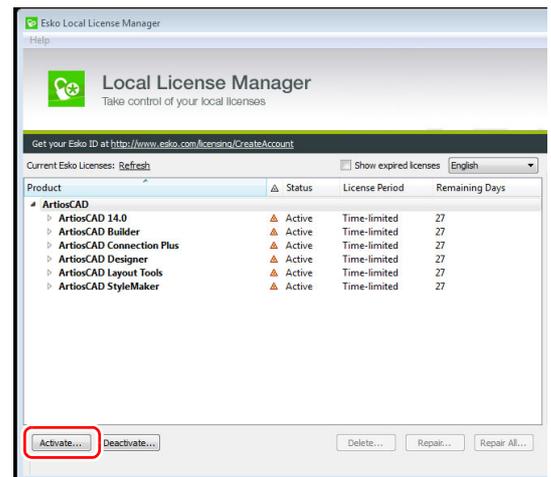

Important!

When more than one of ArtiosCAD DS is already installed on a single PC.

- Open the product key file of the version that you want to cancel activation, and select only the key to cancel.
(If you choose by holding down the Ctrl key, you can select more than one.)

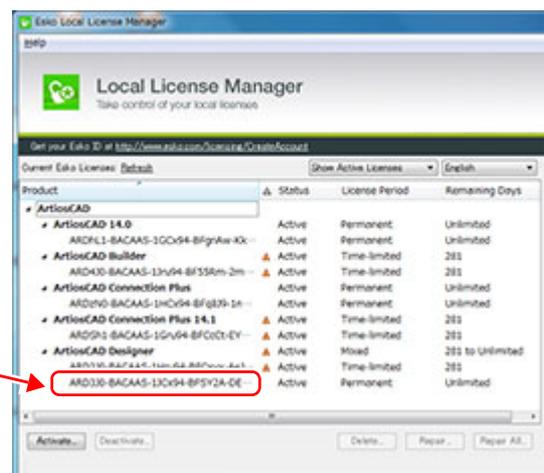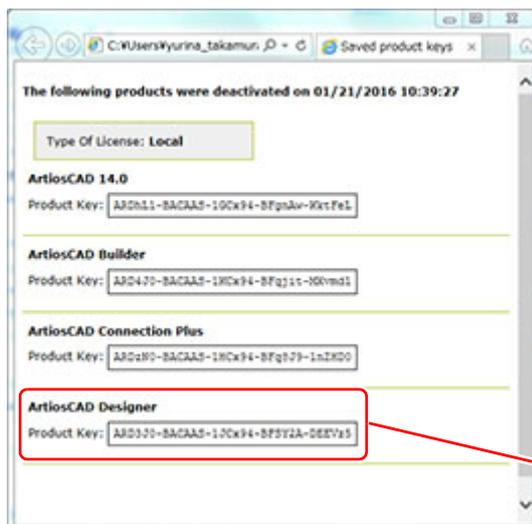


3. Click [Next].




4. Click the [Save...] button, and then save the file of product key.

The product key file will be required to activate the license on another PC. Please keep it carefully.

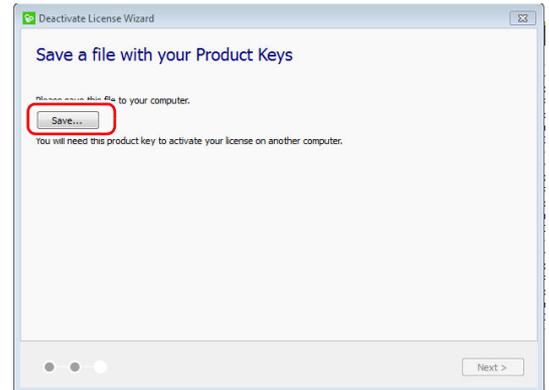


5. Activation release has been completed.

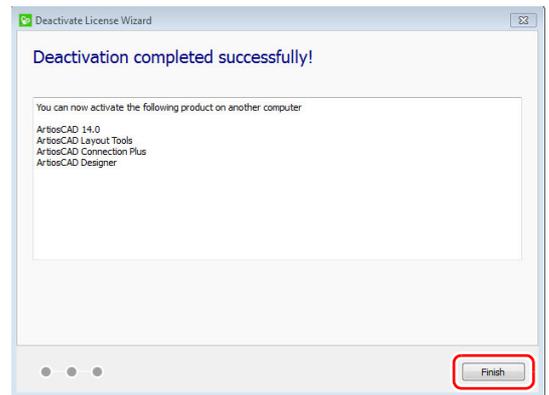


Deactivation (proxy authentication) procedure

This section describes the deactivation procedure for when the installation PC is not connected to the network.


1. Click [Start] - [Esko] - [Local License Manager] - [Manage Local Licenses] to start.

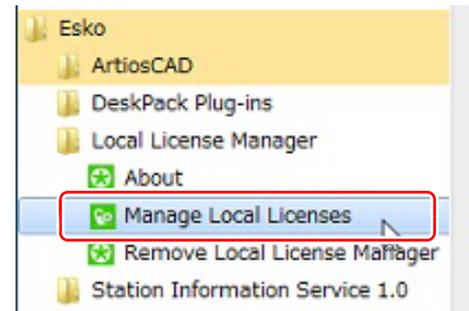


2. Select "ArtiosCAD" and click [Deactivate...].

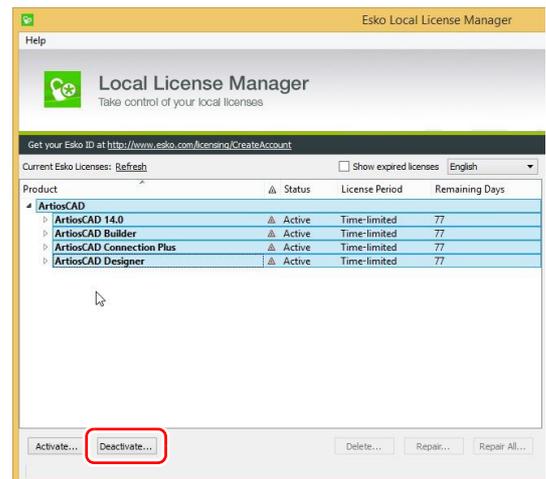


3. Click [Next].

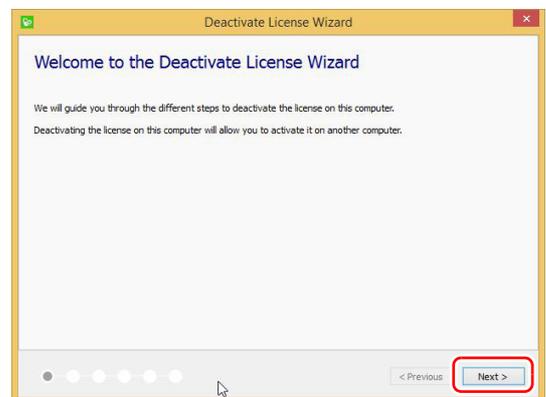


4. When the PC is not connected to the network, select [Activate via another online computer] and click [Next].

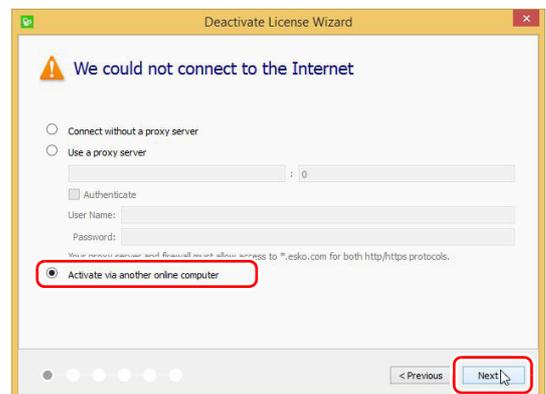



- 5.** Select [Step1 : Save a deactivation request file] and click [Next].

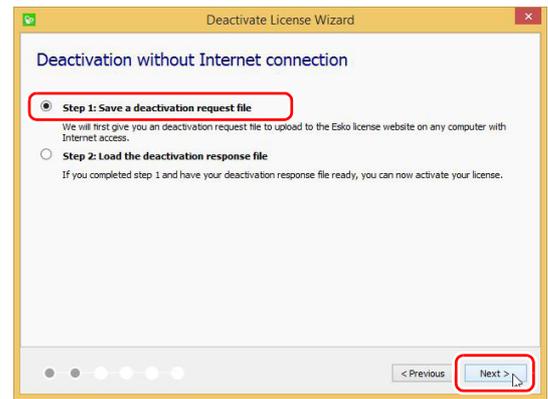

- 6.** Read the displayed conditions carefully, check [I have read the conditions and agree to continue.] and click [Next].

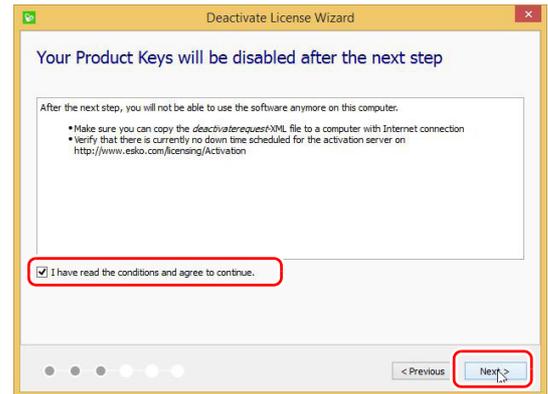


- 7.** Click [Save...] and save the deactivation request file.

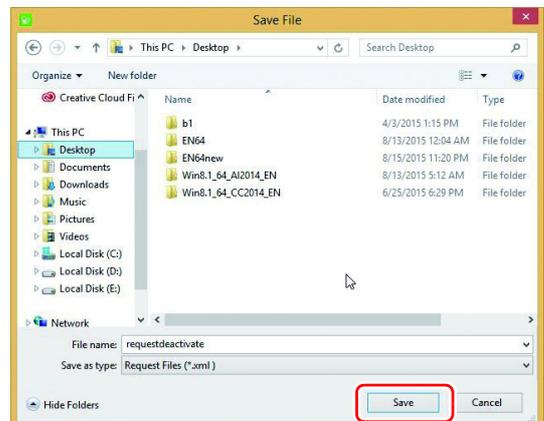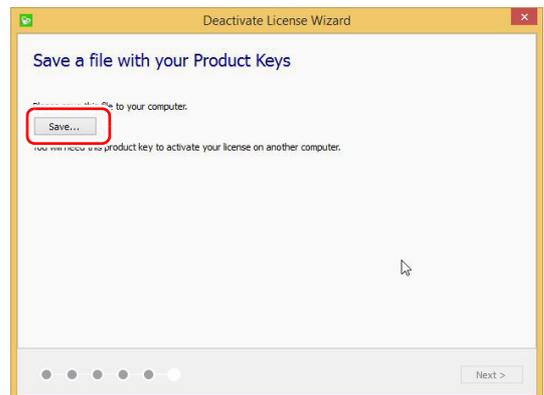


8. Access the URL below from a computer that is connected to the network.


Select "Http://www.esko.com/licensing/Activation [Offline Product Deactivation]" and click [Continue].

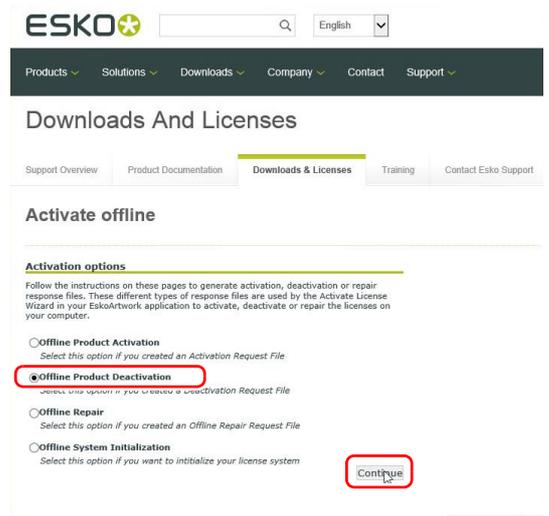


9. Select the file that you saved in step 7 and click [Continue].

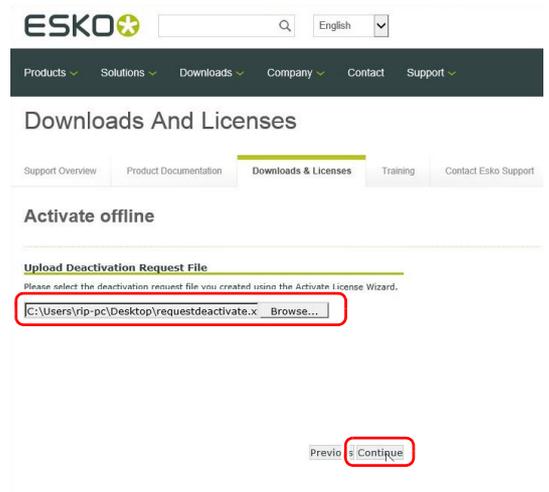

10. Make sure that the online deactivation is complete and click [Continue].

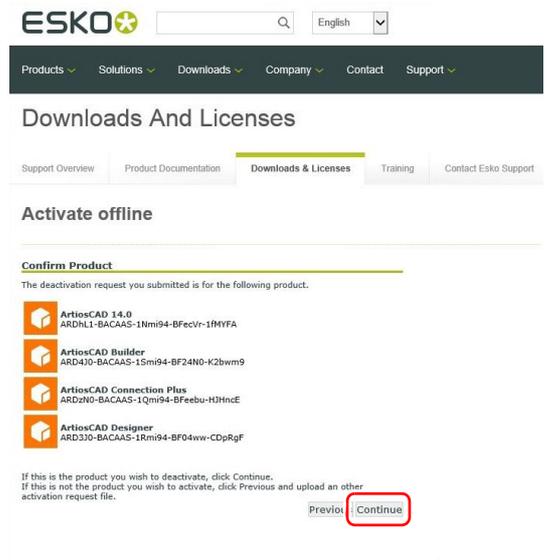


11. Click [Download] and save the file with deactivation results.

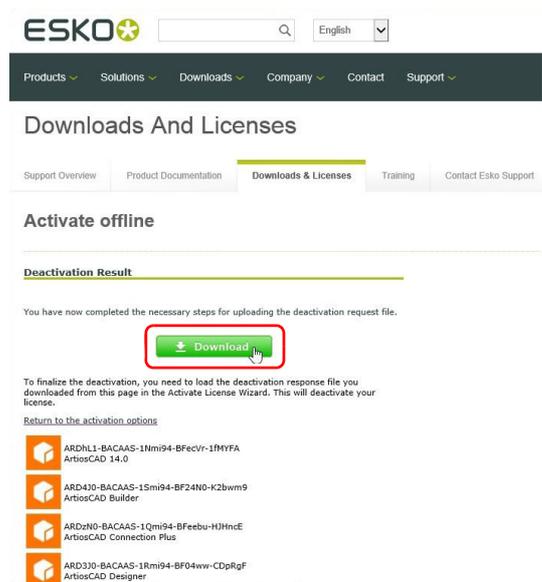


12. On the PC with ArtiosCAD Designer Solution installed, carry out steps 2 to 4.


Select [Step 2 : Load the deactivation response file] and click [Next].

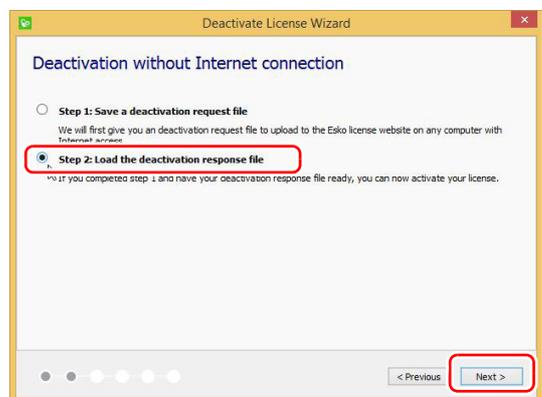

13. Click [Browse...], select the deactivation response file you saved in step 11 and click [Next].

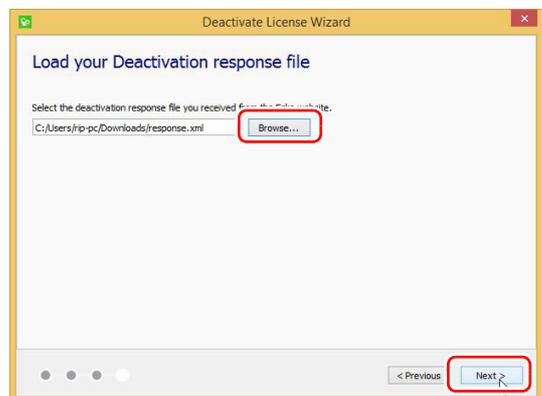


14. The deactivation is now complete. Click [Finish] to close the Wizard.

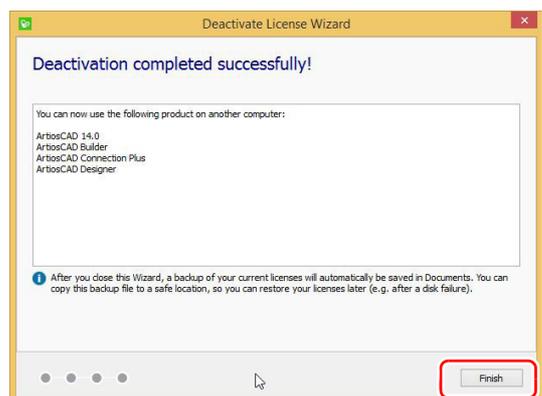

Initial Setting of ArtiosCAD Designer Solution


Before start ArtiosCAD Designer Solution, set the working environment.

- 1. Select [Options] menu - [Defaults...]**
and open ?Defaults? dialog.

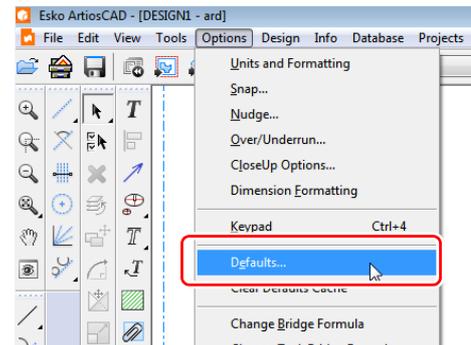


- 2. Set the unit to be used(Inches / Millimeters).**

- (1) Select [Startup Default] - [Units and formatting] from [Shared Defaults], and double-click to open.
- (2) Select the unit to be used and click [OK] button.
The unit is possible to check and change in the upper right of the main dialog.

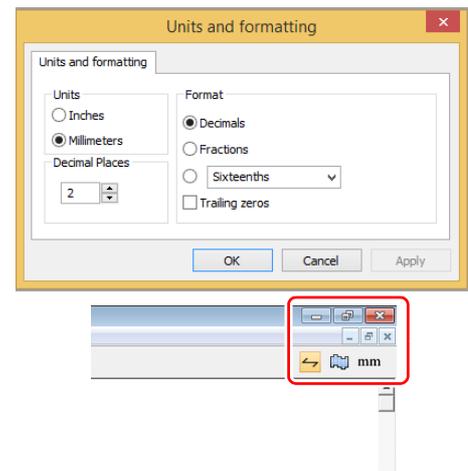


- 3. Set the screen color of the work**

- (1) Select [Design defaults] - [Screen color] from [Shared Defaults] and double click to open.
- (2) Select the screen color to be used from the list, and then click the [OK] button.

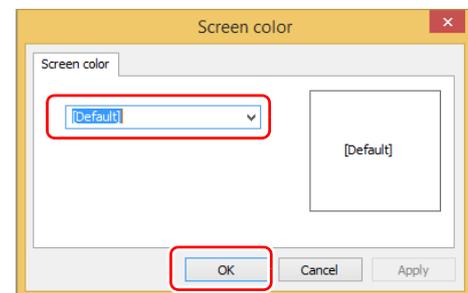


4. Set the frequently used line type to select in the main dialog.

- (1) Select [Design defaults] - [Default Line Type Set] from [Shared Defaults] and double-click to open.
- (2) Select the line type to be used and click [Add to default set]. It will be added to [Default Line Type Set]
Line type that is added will be able to be selected in the line type list in the top of the main dialog.

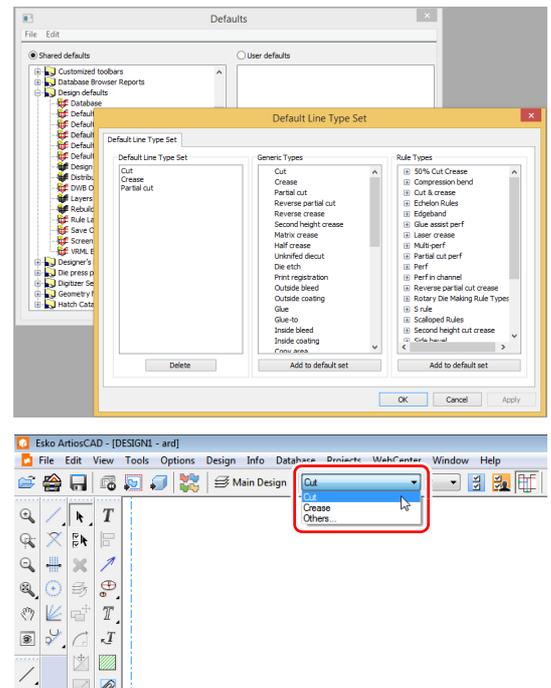

5. Save the created [Plot Style Catalog].

Select [File]menu - [Save] to save and close 「Defaults」 dialog.

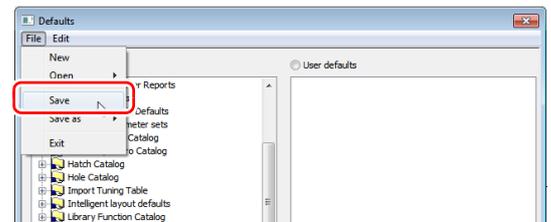

6. Exit ArtiosCAD Designer Solution

The settings will be effective from the next start up.


How to Migrate to New Version of ArtiosCAD Designer Solution

This section describes the procedure for migrating from a previous version of ArtiosCAD DS to a new version of ArtiosCAD DS.

If you already have installed ArtiosCAD DS on the PC, you can take over the configuration of an existing version to the new version at the time of the new version installation.

1. Install the new version of ArtiosCAD DS.

- (1) Perform steps 1 through 5 in "Installation procedure" page 1 in Installation Guide.
- (2) Select "Please copy the configuration from this version", and select the version of ArtiosCAD DS which you want to take over the setting from the list.
 - If there is no need to take over the setting, and install in the default configuration (the initial state), please select the "Please use the default configuration".
- (3) ON or OFF the check box of "Change the previous installation settings", and then click the [Next].
 - ON: You can select the installation location of ArtiosCAD DS.
 - OFF: Install the ArtiosCAD DS in the same folder as the old version.
- (4) Perform steps 6 to 8 of "installation instructions" in Installation Guide.
 - If the check box of "Change the previous installation settings" is OFF, then skip the step 6.

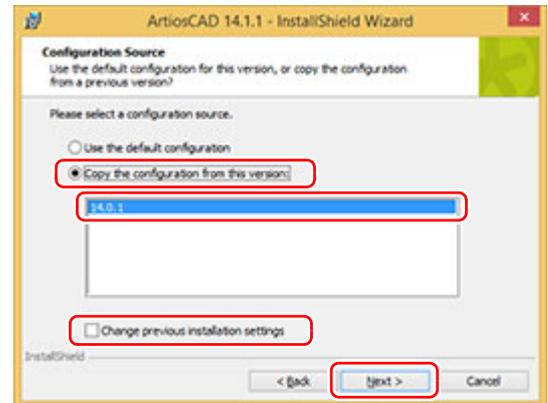

2. Clear the activation of the old version of ArtiosCAD DS.

For the deactivation method, please refer to the "Activation release procedure" page 11 and "Deactivation (proxy authentication) procedure" page 13 in Installation Guide.

3. Uninstall the old version of ArtiosCAD DS.

- (1) Open the [Control Panel] - [Uninstall a program].
- (2) Right-click the ArtiosCAD DS version that you want to uninstall, and select [Uninstall].

Important! • You will not be able to restore the settings of ArtiosCAD DS you've uninstalled. Please make sure the version.

4. Activation of the new version of ArtiosCAD DS.

For the activation method, please refer to the "Activation procedure" page 4 and "Activation (proxy authentication) procedure" page 6 in Installation Guide. Transition to the new version of ArtiosCAD is completed.

